



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Email: cdwinfo@gmail.com
Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

Rio de Janeiro, 21 de Março de 2012.

AO
TRIBUNAL DE JUSTIÇA DO ESTADO DO AMAZONAS

REF.: PREGÃO ELETRONICO Nº 005/2012

RAZÃO SOCIAL: MARIO LUIZ FREIRE DOS SANTOS - ME

CNPJ: 00.717.958/0001-06

TELEFONE(S): (21) 2275-4674

ENDEREÇO: RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO – SANTA LUZIA/MG

CEP.: 33.125-260

ENDEREÇO PARA CORRESPONDÊNCIA: RUA GENERAL RIBEIRO DA COSTA, 38 – SALA 406, LEME
RIO DE JANEIRO / RJ, CEP.: 22010-050

BANCO: BANCO DO BRASIL

AGÊNCIA: 2861-4

CONTA CORRENTE: 17.514-5

VALOR GLOBAL DA PROPOSTA: R\$ 4.828,00 (QUATRO MIL OITOCENTOS E VINTE E OITO REAIS.)

ITEM
1

DESCRIÇÃO
FILMADORA PORTÁTIL

Camera

Sensor	1/3" 2100K Gross Pixels ClearVID CMOS Sensor Effective Pixels, Video: 4:3: 1080K Pixels 16:9: 1430K Pixels Effective Pixels, Still Picture: 4:3: 1990K Pixels 16:9: 1490K Pixels Carl Zeiss Vario-Sonnar F=5.1-51mm, f/1.8-2.9 35mm Equivalent 4:3
Lens	Camera Mode: 50.5-594mm Memory Mode: 37-370mm 16:9 Camera Mode: 41.3-485mm Memory Mode: 40.4-404mm
Zoom	Optical: 10X

CNPJ.: 00.717.958/0001-06

RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO

SANTA LUZIA – MG

CEP.: 33.125-260



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Email: cdwinfo@gmail.com
Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

Digital: 80X
Filter Size 37mm
Image Stabilization Electronic Image Stabilizer
Lux 2 lux (0 lux with Super NightShot Infrared System)

Recording

System NTSC
Format **HD:** AVCHD
SD: MPEG2
Audio Dolby Digital 5.1
Time Code *Not Specified By Manufacturer*
Date & Time *Not Specified By Manufacturer*
A/V Dubbing *Not Specified By Manufacturer*

Display

Viewfinder N/A
LCD Monitor 2.7" 211K Pixels 16:9 Wide Hybrid Touch Panel

Conveniences

Manual Controls Focus, White Balance
Built-in Light LCD Panel Light
Built-in Mic Yes
Built-in Speaker Yes
Accessory Shoe Yes, Hot Shoe
Titler No
Digital Effects Monotone, Pastel, Sepia, Luminance Key and Old Movie
Fade Resistance Black and White
Tape Loading None Hard Disc

Digital Still Mode

Resolution Standard Definition: 530
High Definition: 1080
Card Slot Yes, Memory Stick
Built-in Flash Yes

Input/Output Connectors

CNPJ.: 00.717.958/0001-06
RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO
SANTA LUZIA – MG
CEP.: 33.125-260



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Email: cdwinfo@gmail.com
Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

Line In Recording No

Inputs USB 2.0

Outputs Composite
Component
USB 2.0 (via Handycam Station)
mini HDMI

Edit Protocol *Not Specified By Manufacturer*

Microphone Input No

Headphone Jack No

General

Power Requirements Battery Pack: 7.2V
AC Adapter: 8.4V

Power Consumption Viewfinder: 4.9W
LCD: 5.1W

Dimensions (WxHxD) 3.1 x 3.3 x 6.5" (78 x 84 x 165mm)

Weight 1.9 lbs (720g) with Battery

MARCA / MODELO/ FABRICANTE
SONY HDD HDR SR5

UNIDADE
UM

QUANTIDADE
1

VALOR UNITÁRIO
R\$ 1.450,00

VALOR TOTAL
R\$ 1.450,00

CNPJ.: 00.717.958/0001-06
RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO
SANTA LUZIA – MG
CEP.: 33.125-260



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Email: cdwinfo@gmail.com
Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

ITEM
4

DESCRIÇÃO
MÁQUINA FOTOGRÁFICA

Imaging

Camera Type	Digital SLR with Interchangeable lenses
Lens Mount	Canon EF
Camera Format	APS-C / (1.5x Crop Factor)
Resolution	Effective Pixels: 18 Megapixels Max Resolution: 17.9 MP: 5184 x 3456
Sensor Type / Size	CMOS, 22.3 x 14.9 mm
File Formats	Still Images: JPEG, RAW Movies: MPEG-4 AVC/H.264, MOV
Bit Depth	14-bit
Memory Card Type	SD SDHC SDXC

AV Recording

Video Recording	Yes, NTSC/PAL
Aspect Ratio	4:3, 16:9
Video Clip Length	Up to 22 Minutes Limited by Memory Card Capacity
Audio Recording	With Video, Mono

Focus Control

Focus Type	Auto & Manual
------------	---------------

Viewfinder/Display

Viewfinder Type	Pentaprism
Viewfinder Coverage	96%
Live View	Yes

Exposure Control

ISO Sensitivity	100-6400 (Extended Mode: 100-12800)
Shutter	30 - 1/8000 sec

CNPJ.: 00.717.958/0001-06
RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO
SANTA LUZIA – MG
CEP.: 33.125-260



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Email: cdwinfo@gmail.com
Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

Mirror Lock-Up	Yes
Metering Method	Spot metering, Center-weighted average metering, null
Exposure Modes	Modes: Aperture Priority, Auto, Manual, Shutter Priority
White Balance Modes	Auto, Cloudy, Daylight, Flash, Fluorescent (White), Shade, Tungsten, Preset Manual

Flash

Built-in Flash	Yes: Auto
Max Sync Speed	1 / 250 sec
Continuous Shooting	Up to 5.3 fps
External Flash Connection	Hot Shoe

Performance

Connectivity	AV Output, HDMI C (Mini), USB 2.0
Wi-Fi Capable (With Optional Transmitter)	Yes
Software Requirements	Windows: 98, ME, 2000, XP, Vista, 7 Mac: OS X 10.1 or later

Power

Battery	1x LP-E6 Rechargeable Lithium-Ion Battery Pack
AC Power Adapter	AC Adapter Kit ACK-E6 (Optional)

Storage

Operating/Storage Temperature	32 to 104 °F (0 to 40 °C)
-------------------------------	---------------------------

Physical

Dimensions (WxHxD)	5.69 x 4.17 x 3.09" / 14.45 x 10.59 x 7.85 cm
Weight	23.8 oz / 675 g <i>Body only</i>

MARCA / MODELO / FABRICANTE
CANON EOS 60D

UN
Um

QUANTIDADE
1

VALOR UNITÁRIO
R\$ 2.580,00

CNPJ.: 00.717.958/0001-06
RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO
SANTA LUZIA – MG
CEP.: 33.125-260

7



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS - ME

Email: cdwinfo@gmail.com

Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406

Rio de Janeiro - RJ

CEP.: 22.010-050

Telefone.: 55(21)22754674

VALOR TOTAL
R\$ 2.580,00

ITEM
5

DESCRIÇÃO
FLASH

Mount	Shoe
Guide No.	141' (42.98 m) at 105 mm position
Exposure Control	Manual/TTL
Angle of Coverage	84° - 23.3° Wide-Angle Adapter: 114° - 23.3°
Vari-Power	1/1 - 1/64
TTL Dedication Yes / Bounce Head Yes / Swivel Head Yes	
Coverage	24 mm - 50 mm (Full frame)
Zoom Head	Full frame: 24 mm - 105 mm
Power Source	4x AA Alkaline, Lithium, Rechargeable Ni-MH Batteries
Dimensions (WxHxD)	2.8 x 4.8 x 4.0" / 7.11 x 12.19 x 10.16 cm
Weight	11.6 oz / 329

MARCA / MODELO / FABRICANTE
CANON EXII

UN
Um

QUANTIDADE
1

VALOR UNITÁRIO
R\$ 798,00

VALOR TOTAL
R\$ 798,00

CNPJ.: 00.717.958/0001-06
RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO
SANTA LUZIA - MG
CEP.: 33.125-260




CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Email: cdwinfo@gmail.com
Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

Validade da Proposta: 60 (sessenta) dias.

Observações:

1. A empresa licitante poderá apresentar proposta para o item 1, grupo 1 ou ambos;
2. Estão inclusos nos preços supramencionados todos os custos diretos e indiretos, inclusive de fretes ou os resultantes da incidência de quaisquer tributos, contribuições ou obrigações decorrentes da legislação trabalhista, fiscal e previdenciária a que estiver sujeito.

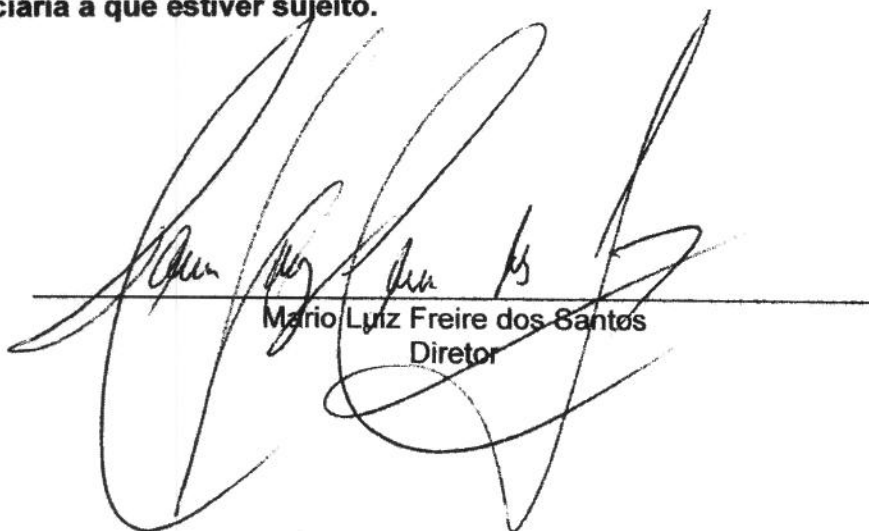

Mario Luiz Freire dos Santos
Diretor

CNPJ.: 00.717.958/0001-06
RUA DO DIVINO, COMPLEMENTO "A", BAIRRO SÃO BENEDITO
SANTA LUZIA – MG
CEP.: 33.125-260



CDW INFORMATICA E COMUNICAÇÃO
MARIO LUIZ FREIRE DOS SANTOS – ME

Endereço para correspondência:
Rua General Ribeiro da Costa, 38 sala 406
Rio de Janeiro – RJ
CEP.: 22.010-050
Telefone.: 55(21)22754674

Rio de Janeiro, 21 de Março de 2012.


AO
TRIBUNAL DE JUSTIÇA DO ESTADO DO AMAZONAS

REF.: PREGÃO ELETRONICO Nº 005/2012

DECLARAÇÃO


CDW INFORMATICA E COMUNICAÇÃO – MARIO LUIZ FREIRE DOS SANTOS - ME, inscrito no CNPJ nº 00.717.958/0001-06, sediada à Rua Três, 64 – Loja 'B', Rio Acima – MG CEP: 34.300-000, declara para os devidos fins, que os equipamentos cotados por nossa empresa, atendem plenamente os requisitos técnicos exigidos em edital. Toda característica técnica do equipamento ofertado é igual ou superior ao solicitado, conforme comprovado em nossa proposta comercial e catálogos técnicos enviados por anexo.

Sem mais para o momento, ficamos no aguardo da devida homologação dos itens ofertados.

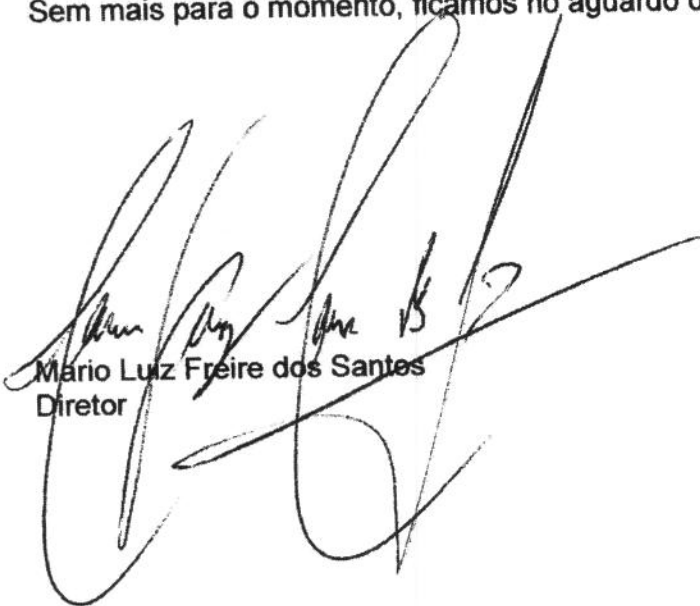

Mario Luiz Freire dos Santos
Diretor

CNPJ.: 00.717.958/0001-06
RUA TRES, 64 – LOJA B
RIO ACIMA – MG
CEP.: 34.300-000

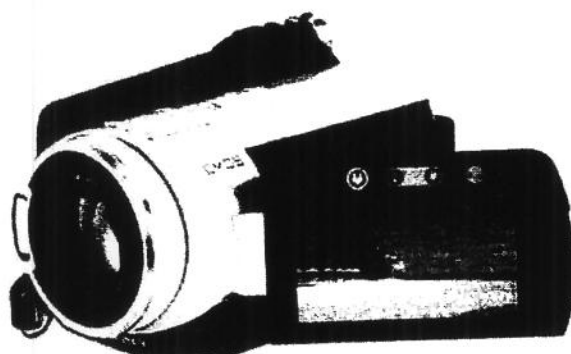

Sony HDR-SR5

Camera

Sensor	1/3" 2100K Gross Pixels ClearVID CMOS Sensor
	Effective Pixels, Video:
	4:3: 1080K Pixels
	16:9: 1430K Pixels
Lens	Effective Pixels, Still Picture:
	4:3: 1990K Pixels
	16:9: 1490K Pixels
	Carl Zeiss Vario-Sonnar
Zoom	F=5.1-51mm, f/1.8-2.9
	35mm Equivalent
	4:3
	Camera Mode: 50.5-594mm
Filter Size	Memory Mode: 37-370mm
	16:9
	Camera Mode: 41.3-485mm
	Memory Mode: 40.4-404mm
Image Stabilization	Optical: 10X ✓
	Digital: 80X ✓
Lux	37mm
	Electronic Image Stabilizer
Recording	2 lux (0 lux with Super NightShot Infrared System)

System NTSC
Format **HD:** AVCHD
SD: MPEG2
Audio Dolby Digital 5.1
Time Code *Not Specified By Manufacturer*
Date & Time *Not Specified By Manufacturer*
A/V Dubbing *Not Specified By Manufacturer*

Display

Viewfinder N/A
LCD Monitor 2.7" 211K Pixels 16:9 Wide Hybrid Touch Panel

Conveniences

Manual Controls Focus, White Balance
Built-in Light LCD Panel Light
Built-in Mic Yes
Built-in Speaker Yes
Accessory Shoe Yes, Hot Shoe
Titler No
Digital Effects Monotone, Pastel, Sepia, Luminance Key and Old Movie
Fade Resistance Black and White
Tape Loading None Hard Disc

Digital Still Mode

Resolution Standard Definition: 530
High Definition: 1080
Card Slot Yes, Memory Stick
Built-in Flash Yes

Input/Output Connectors

Line In Recording No
Inputs USB 2.0
Composite
Outputs Component
USB 2.0 (via Handycam Station)
mini HDMI
Edit Protocol *Not Specified By Manufacturer*
Microphone Input No
Headphone Jack No

General

Power Requirements Battery Pack: 7.2V
AC Adapter: 8.4V

Power Consumption	Viewfinder: 4.9W LCD: 5.1W
Dimensions (WxHxD)	3.1 x 3.3 x 6.5" (78 x 84 x 165mm)
Weight	1.9 lbs (720g) with Battery



Canon EOS 60D

Imaging

Camera Type	Digital SLR with Interchangeable lenses
Lens Mount	Canon EF
Camera Format	APS-C / (1.5x Crop Factor)
Resolution	Effective Pixels: 18 Megapixels Max Resolution: 17.9 MP: 5184 x 3456
Sensor Type / Size	CMOS, 22.3 x 14.9 mm
File Formats	Still Images: JPEG, RAW Movies: MPEG-4 AVC/H.264, MOV
Bit Depth	14-bit
Memory Card Type	SD SDHC SDXC

AV Recording

Video Recording	Yes, NTSC/PAL
Aspect Ratio	4:3, 16:9
Video Clip Length	Up to 22 Minutes Limited by Memory Card Capacity
Audio Recording	With Video, Mono

Focus Control

Focus Type	Auto & Manual
------------	---------------

Viewfinder/Display

Viewfinder Type	Pentaprism
-----------------	------------

Viewfinder Coverage 96%

Live View Yes

Exposure Control

ISO Sensitivity 100-6400 (Extended Mode: 100-12800)

Shutter 30 - 1/8000 sec

Mirror Lock-Up Yes

Metering Method Spot metering, Center-weighted average metering, null

Exposure Modes Modes: Aperture Priority, Auto, Manual, Shutter Priority

White Balance Auto, Cloudy, Daylight, Flash, Fluorescent (White), Shade, Tungsten, Preset Manual

Flash

Built-in Flash Yes: Auto

Max Sync Speed 1 / 250 sec

Continuous Shooting Up to 5.3 fps

External Flash Connection Hot Shoe

Performance

Connectivity AV Output, HDMI C (Mini), USB 2.0

Wi-Fi Capable (With Optional Transmitter) Yes

Software Requirements Windows: 98, ME, 2000, XP, Vista, 7
Mac: OS X 10.1 or later

Power

Battery 1x LP-E6 Rechargeable Lithium-Ion Battery Pack

AC Power Adapter AC Adapter Kit ACK-E6 (Optional)

Operating/Storage Temperature **Storage**
32 to 104 °F (0 to 40 °C)

Physical

Dimensions (WxHxD) 5.69 x 4.17 x 3.09" / 14.45 x 10.59 x 7.85 cm

Weight 23.8 oz / 675 g *Body only*



Canon 430EX II Speedlite

Mount	Shoe
Guide No.	141' (42.98 m) at 105 mm position
Exposure Control	Manual/TTL
Angle of Coverage	84° - 23.3° Wide-Angle Adapter: 114° - 23.3°
Vari-Power	1/1 - 1/64
TTL Dedication Yes / Bounce Head Yes / Swivel Head Yes	
Coverage	24 mm - 50 mm (Full frame)
Zoom Head	Full frame: 24 mm - 105 mm
Power Source	4x AA Alkaline, Lithium, Rechargeable Ni-
MH Batteries	
Dimensions (WxHxD)	2.8 x 4.8 x 4.0" / 7.11 x 12.19 x 10.16 cm
Weight	11.6 oz / 329 g